SPARK Fire Ribbon Direct Vent 3 ft








A modern fire—clean, uncluttered lines framing a pure ribbon of fire. A fixed ceramic glass window complements its sleek dimensions.



SPARK Fire Ribbon Direct Vent 3 ft



- Vent through the roof or side wall
- Up to 80% efficient
- Heating capacity enhanced with integrated fan
- Accepted by all major building and mechanical codes in the U.S. including the IMC and the UMC
- Approved in all 50 states and Canada
- No draft concerns
- Available in Millivolt or Electronic Ignition versions

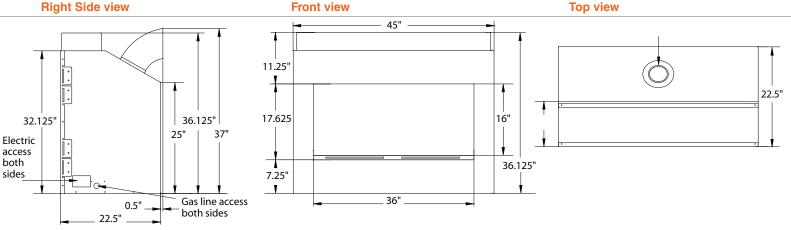

Model No.

Interior opening **Outer dimensions** Gas type On/off **Efficiency Venting Options Vent Type** Fan **Electric BTU** input Doors/glass Interior color Certification

Optional Media for Tray:

DV 87

Does not require vertical venting.

36"W x 16"H x 16.5"D 45"W x 36.125"H x 22.5"D Natural or LP/propane Remote control or wall switch Up to 80% Through sidewall or roof

Simpson Duravent GS Pro 6 5/8" diameter Thermostat activated 160 c.f.m.

110 v. for fan

19,000 - 28,000 BTU/h Fixed ceramic glass panel

Amethyst

Satin Black

Omni Testing Labs ANSI Z21.88-2005

CSA 2.33-2005

DV 88

Requires 3' vertical venting before any horizontal venting

36"W x 16"H x 16.5"D 45"W x 36.125"H x 22.5"D Natural or LP/propane Remote control or wall switch Up to 80%

Through sidewall or roof

Simpson Duravent GS Pro 6 5/8" diameter

Thermostat activated 160 c.f.m.

110 v. for fan

28,000 - 35,000 BTU/h


Fixed ceramic glass panel

Rocks

Satin Black

Omni Testing LabsANSI Z21.88-2005

CSA 2.33-2005

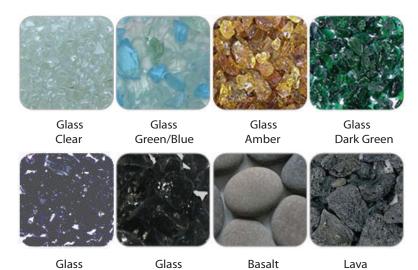

Stones

Black

Woodbridge Fireplace www.woodbridgefp.com

SHOWROOM ADDRESS: 1305 Meyerside Dr., Mississauga, L5T 1C9

Tel: 905-564-3001